

Solar Brasil

Transforme a Energia do Sol em Eletricidade




KS20

MULTICRYSTAL PHOTOVOLTAIC MODULE

TYPICAL OUTPUT 20 Wp

Model KS20

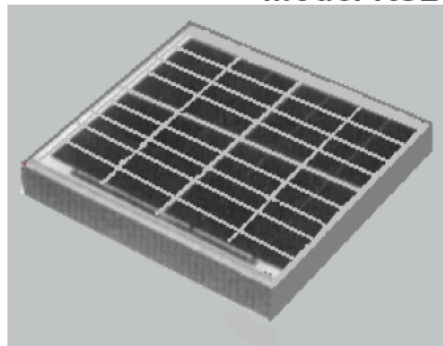

HIGHLIGHTS OF KYOCERA PHOTOVOLTAIC MODULES

Kyocera's advanced cell processing technology and automated production facilities have produced a highly efficient multicrystal photovoltaic modules.

These cells are encapsulated between a tempered glass cover and an EVA pottant with PVF back sheet to provide maximum protection from the most severe environmental conditions.

The entire laminate is installed in an anodized aluminium frame to provide structural strength and ease of installation.

APPLICATIONS

- Microwave / radio repeater stations
- Electrification of villages in remote areas
- Medical facilities in rural areas
- Power source for summer vacation homes
- Emergency communication systems
- Water quality and environmental data monitoring systems
- Navigation lighthouses, and ocean buoys
- Pumping systems for irrigation, rural water supplies and livestock watering
- Aviation obstruction lights
- Cathodic protection systems
- Desalination systems
- Recreational vehicles
- Railroad signals
- Sailboat charging systems

SPECIFICATIONS

■ Electrical Specifications

Maximum Power	20 Watts
Maximum Power Voltage	16.9 Volts
Maximum Power Current	1.20 Amps
Open Circuit Voltage	21.5 Volts
Short-Circuit Current	1.24 Amps

■ Physical Specifications

Length	520 mm
Width	304 mm
Depth	22 mm
Weight	2.3 kg

Note: The electrical specifications are under test conditions of Irradiance of 1 kW/m², Spectrum of 1.5 air mass and cell temperature of 25°C

The contents of this catalogue are subject to change without prior notice for further improvement.

Solar Brasil Tecnologia & Energia Fotovoltaica Ltda

Rua Rita Joana de Souza, 536 – Brooklin – São Paulo SP CEP: 04601-061

Fone: 11-5041-7666 11-5542-7980 11-5531-6784 11-5535-4071 Fax: 11-5044-3413

Site: www.solarbrasil.com.br

email: solar@solarbrasil.com.br