


Módulo Solar Fotovoltaico 260W - 60 células Inmetro Classe "A"



Moderna tecnologia, alto desempenho e excelente qualidade


SPECIFICATIONS

Dimensions	1640 x 992 x 40 mm
Weight	17.75 kg
Frame	Aluminium hollow-chamber frame on each side
Glass	Low-iron and tempered glass 3.2 mm
Cells	60 pcs multicrystalline Si-cells (156 x 156 mm)
Cell Embedding	EVA
Back-Foil	FEVE / PET / FEVE
Junction Box	TÜV certified
Cable	4 mm ² solar cable 2 x 900 mm
Temperature Range	-40°C ... +85°C
Load Capacity	2400Pa(IEC61215),35mm 5400Pa(IEC61215),45mm
Application class	Class A
Electrical protection class	Class II
Fire safety class	Class C
Product Warranty	10 years
Power Guarantee	10 years 90% 25 years 80%

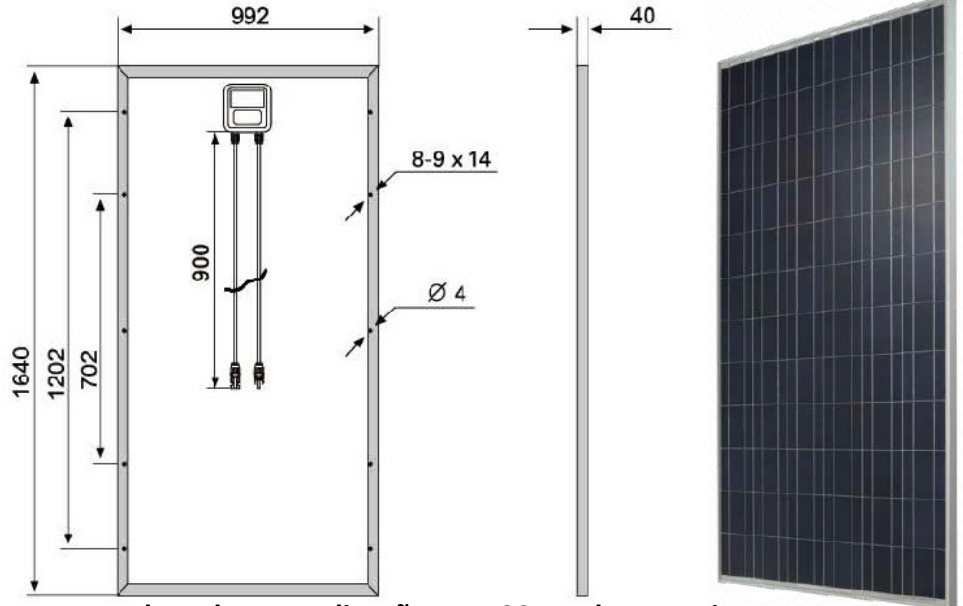


Acompanha cabos para ligação com 90 cm de comprimento

CURRENT-VOLTAGE CURVES

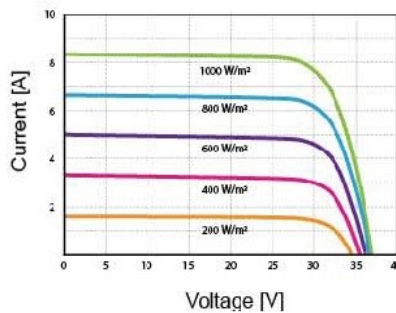

Module characteristics at constant module temperatures of 25°C and variable levels of irradiance

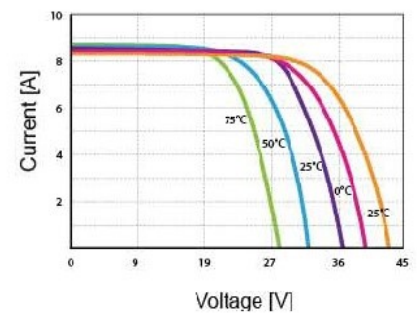

Module characteristics at variable module temperatures and constant module irradiance of 1.000 W/m²

CHARACTERISTICS

Max. System Voltage	1000V/DC
Temperature-Coefficient I _{sc}	+0.08558%/°K
Temperature-Coefficient V _{oc}	-0.29506%/°K
Temperature-Coefficient P _{mp}	-0.38001%/°K
NOCT***	45°C

ESPMC TYPE	260	265	260	265	270
Power Class	250W	255W	260W	265W	270W
Max. Power Voltage (V _{mp}) [*] at STC**	30.9V	31.15V	31.35V	31.6V	31.8V
Max. Power Current (I _{mp}) at STC	8.1A	8.19A	8.3A	8.4A	8.5A
Open Circuit Voltage (V _{oc}) at STC	36.6V	36.8V	37V	37.2V	37.4V
Short Circuit Current (I _{sc}) at STC	8.75A	8.81A	8.92A	9.03A	9.14A
Module Efficiency	15.3 %	15.6 %	16 %	16.2%	16.5%

* MPP: Maximum Power Point

** STC (Standard Test Conditions): 1000W/m², 25°C, AM 1.5

*** Normal Operating Cell Temperature

CERTIFICATES

IEC 61215 edition 2 (TÜV Nord)
(TÜV Rheinland)

IEC 61730 MCS INMETRO

CE CEC SALT-MIST

PID Resistant

INSURANCE

Chubb



ERA SOLAR and the ERA SOLAR logo are trademarks or registered trademarks of ERA SOLAR Corporation.
© March 2015 ERA SOLAR Corporation. All rights reserved. Specifications included in this datasheet are subject to change without notice.

10 anos de garantia contra defeitos de fabricação e até 25 anos conta queda de eficiência.